



 **PREMIER TECH**

SINCE 1923

GLOBAL STRUCTURE



HORTICULTURE
AND AGRICULTURE
GROUP

INDUSTRIAL
EQUIPMENT
GROUP


ENVIRONMENTAL
TECHNOLOGIES
GROUP



3 600



TEAM MEMBERS
WORLDWIDE



SALES OF

C\$673 M

10.6% organic growth

3.7% acquisition



PRESENT IN
24
COUNTRIES






39



MANUFACTURING
FACILITIES

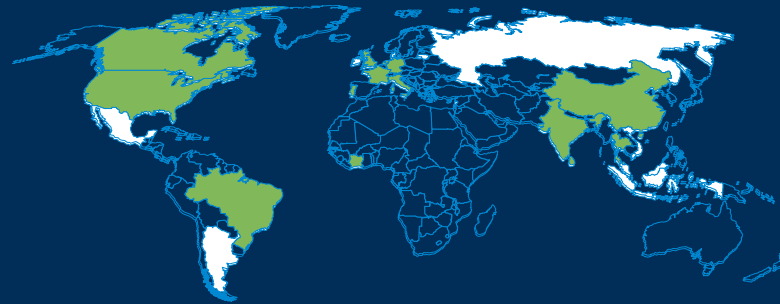

RESEARCH & DEVELOPMENT

225 TEAM MEMBERS

INTERNATIONAL PORTFOLIO
OF MORE THAN 150 PATENTS

CONTINUOUS ROLLING
5-YEAR PROGRAM





INDUSTRIAL EQUIPMENT GROUP

**INDUSTRIAL
EQUIPMENT GROUP**

FROM

1989

**BAGGING OUR
OWN PRODUCT**

**INDUSTRIAL
EQUIPMENT GROUP**

TO
2016 
**THE INDUSTRIAL
PACKAGING SYSTEM
WORLDWIDE LEADER**

**INDUSTRIAL
EQUIPMENT GROUP**

 **FLEXIBLE & RIGID** 
PACKAGING SOLUTIONS
PROVIDER



**INDUSTRIAL
EQUIPMENT GROUP**

11 
**MANUFACTURING
P L A N T S
WORLDWIDE**

**INDUSTRIAL
EQUIPMENT GROUP**




SALES

C\$225 M

**INDUSTRIAL
EQUIPMENT GROUP**

1 100 
TEAM MEMBERS

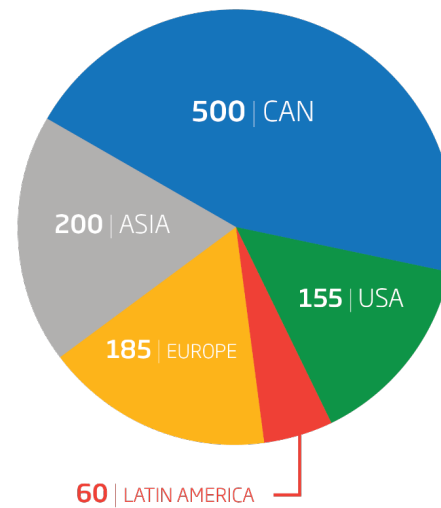

INDUSTRIAL
EQUIPMENT GROUP
CUSTOMERS




INNOVATION

**“THE DISTINCTION
BETWEEN A LEADER
AND A FOLLOWER”**



INNOVATION

ROBOTIC REVOLUTION

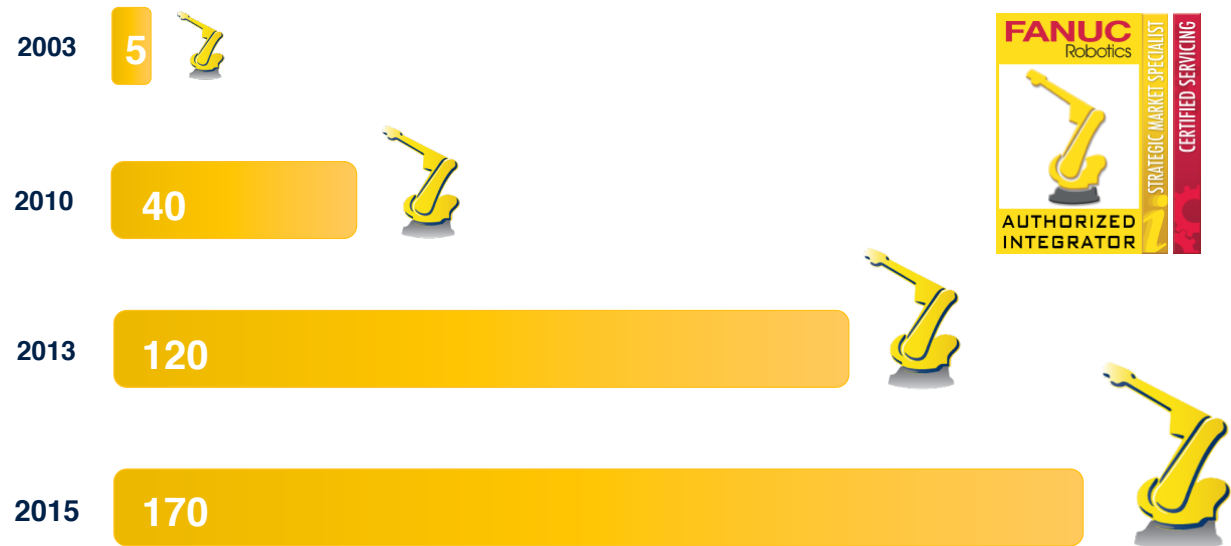

**TOTAL OF 700
ROBOT SYSTEMS INTEGRATED**


FFS-SERIES

FORM, FILL AND SEAL
BAGGER





PTR-SERIES
COMPACT OPEN-MOUTH
BAGGER

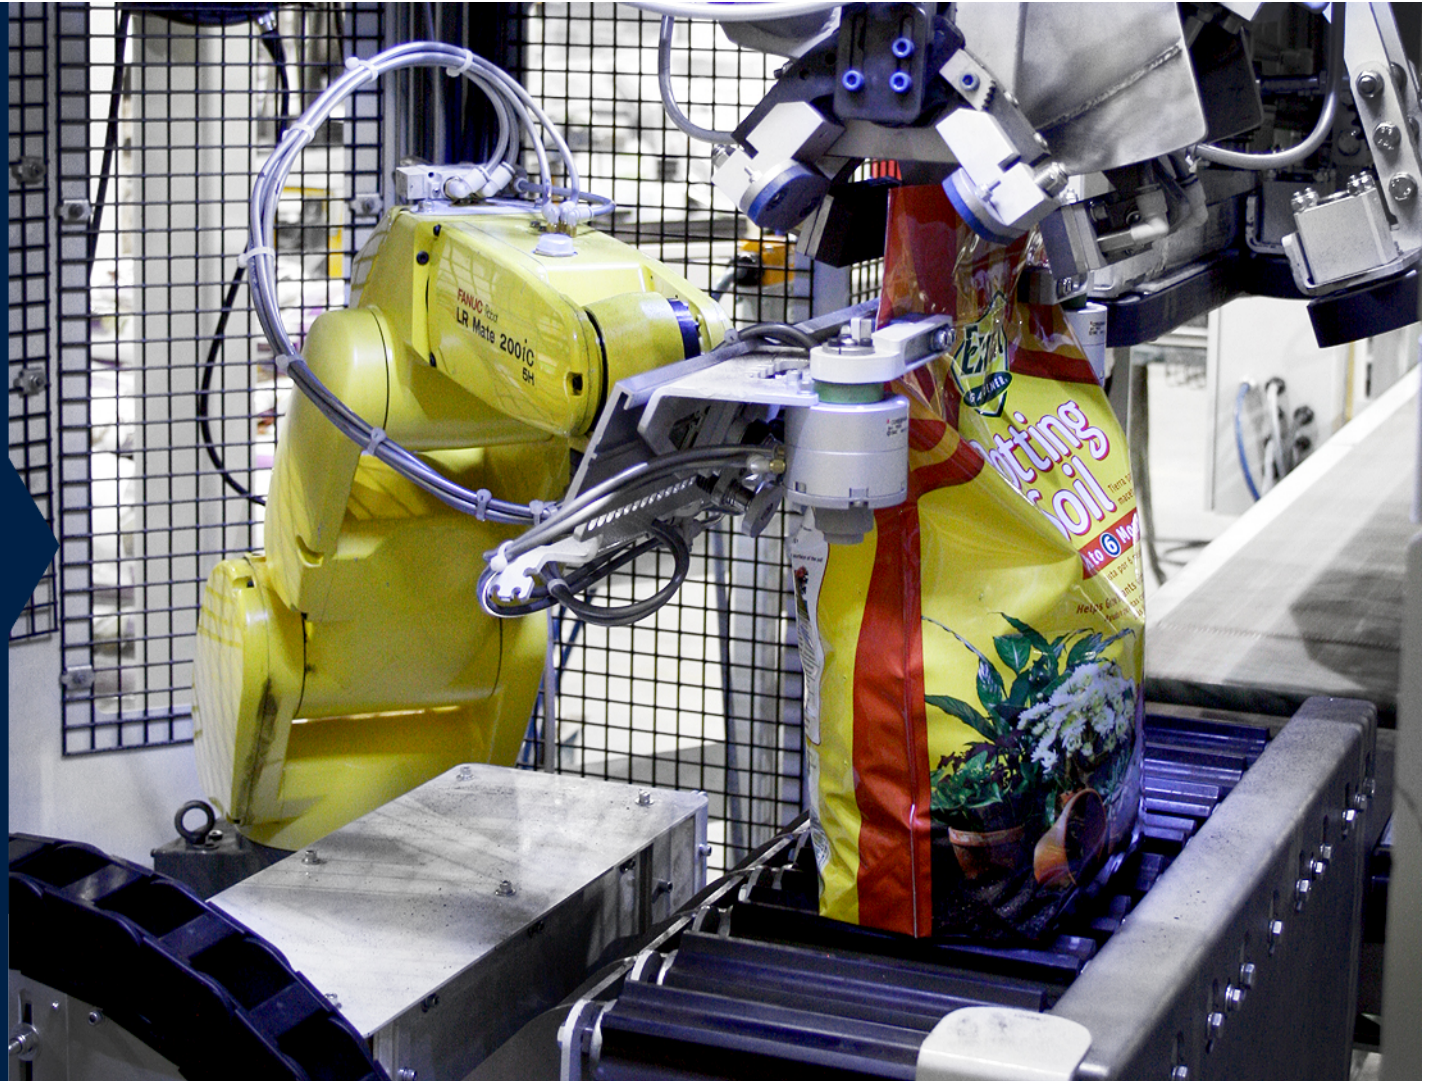



BG-SERIES


BULK BAG FILLER
(FIBC BAGGERS)






AP-SERIES HIGH LEVEL PALLETIZER



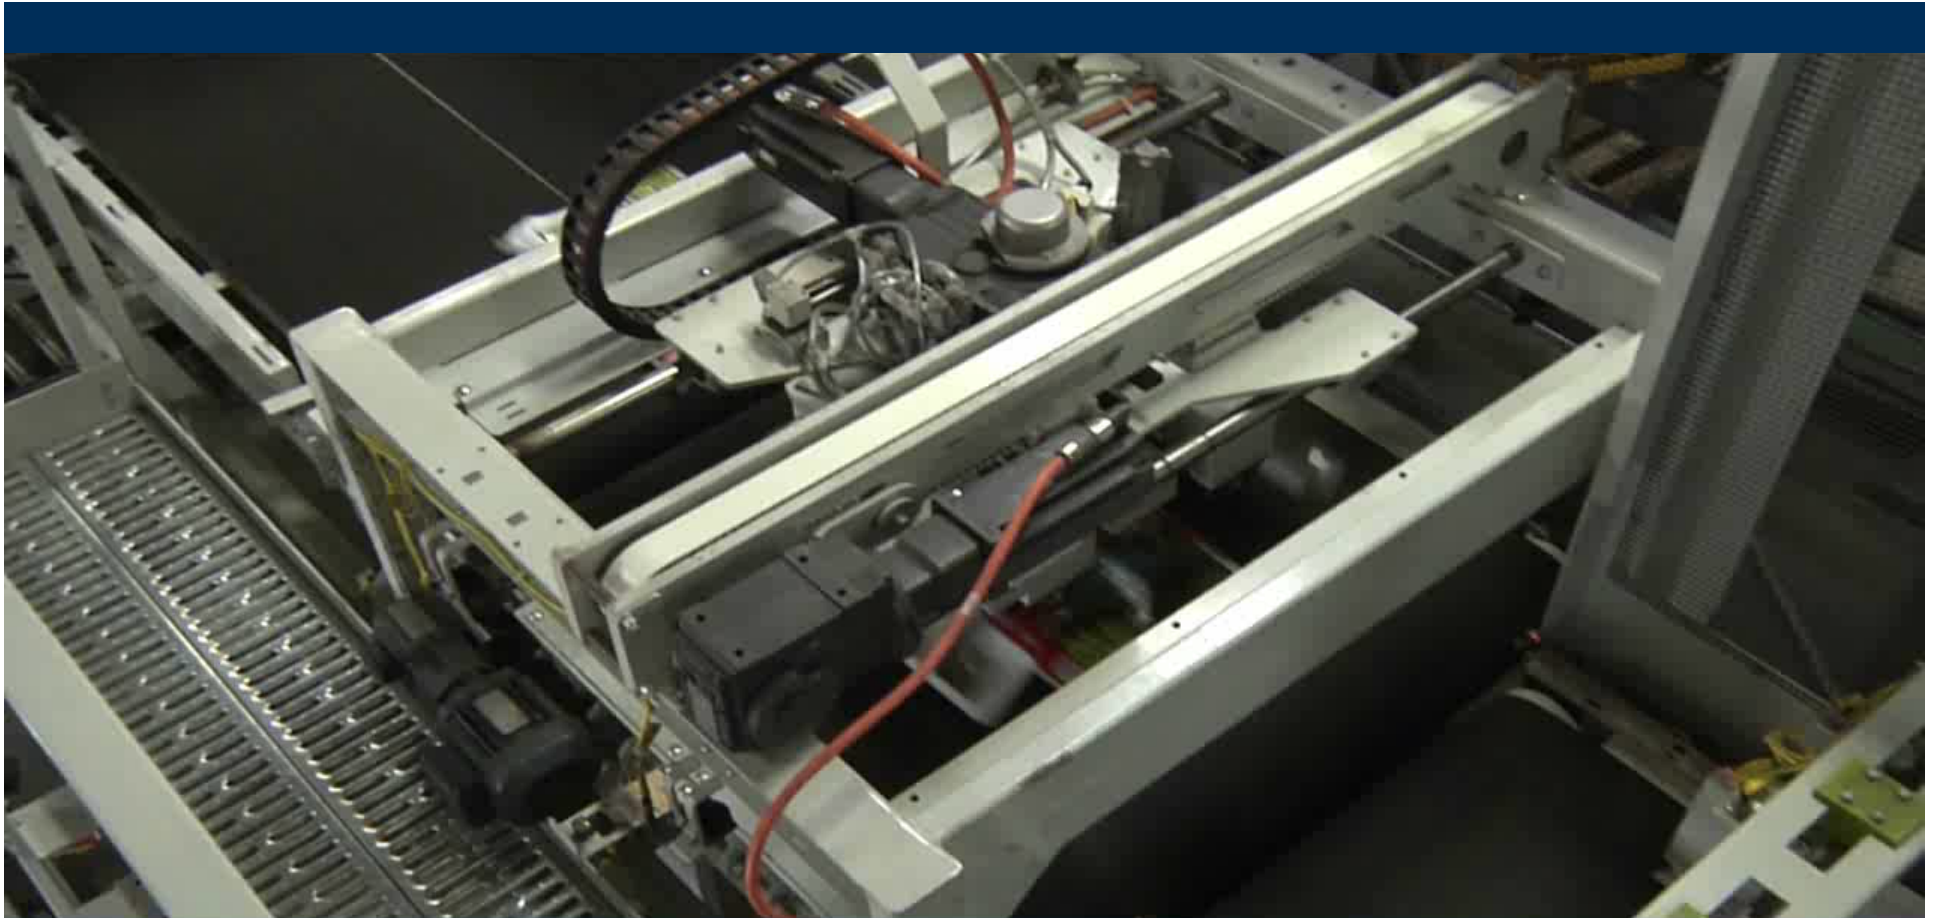

AR-SERIES ROBOTIC PALLETIZER

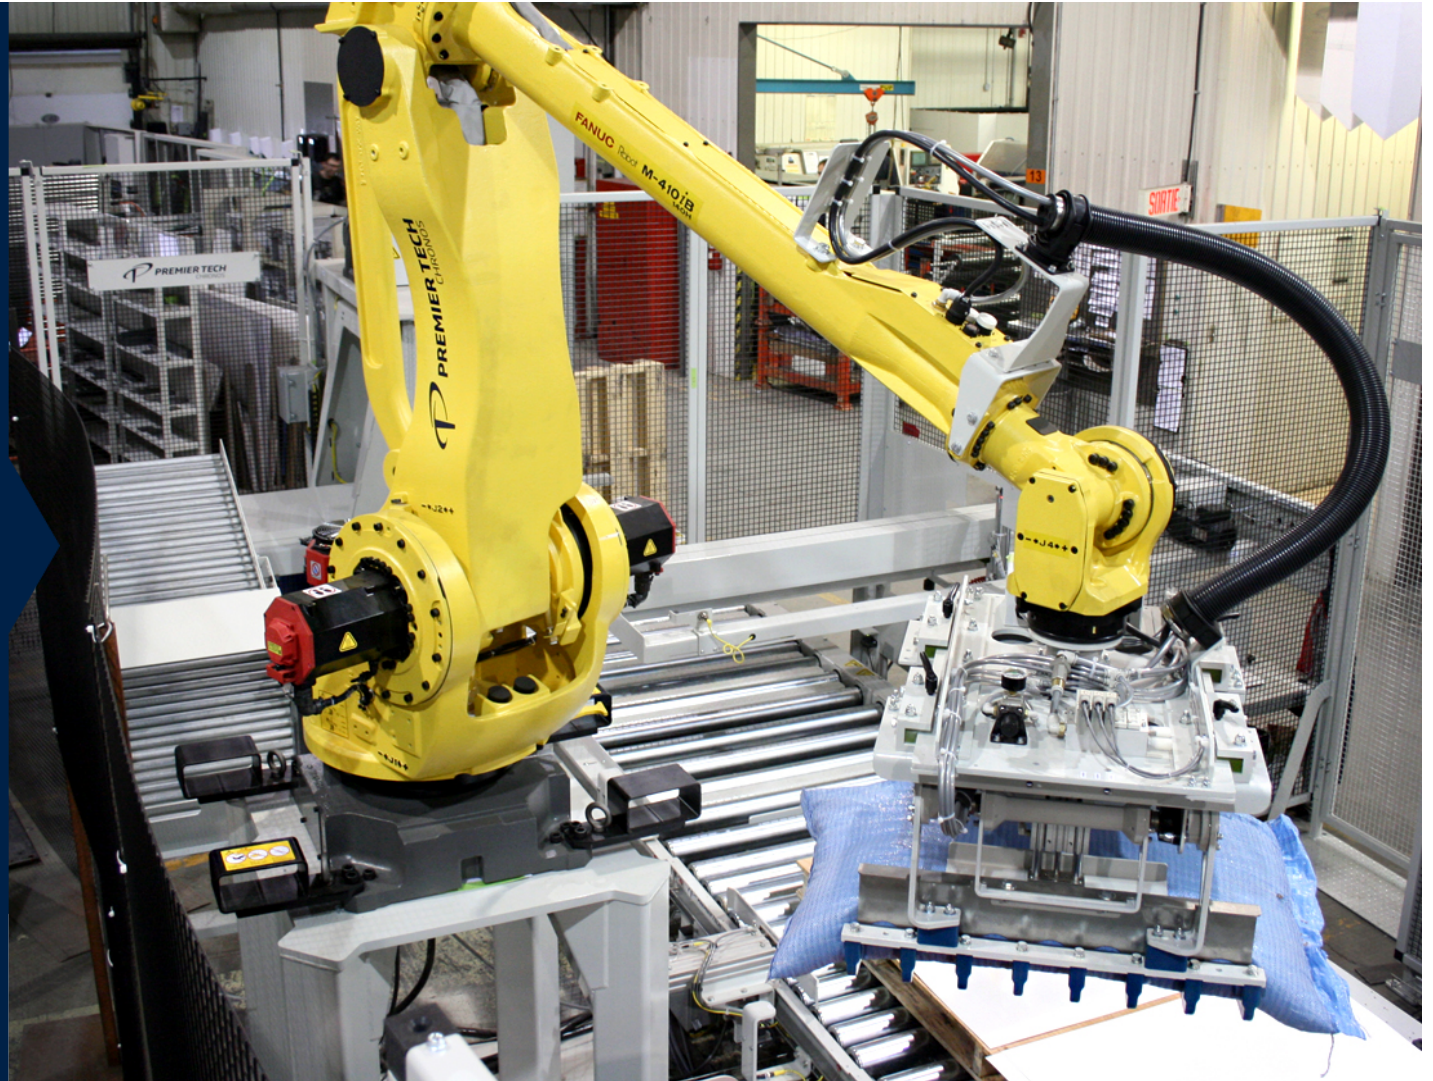



STRETCH-ALL

STRETCH HOODER

 **PREMIER TECH**
CHRONOS





Production rate

Up to **100 loads per hour***

*Depending on loading height, film thickness, etc

Technical data	Min	Max
Version 1		
Rectangle shaped pallets:.....	48" x 31.5"	55" x 48"
Version 2		
Square shaped pallets:.....	40" x 40"	48" x 48"
Loading height*:.....	2'- 0" (610mm)...	9'- 0" (2743mm)
Loading weight:.....	Up to 4400 pounds	
Load conveying height:.....	20" (500 mm) above floor	
Film thickness:.....	2.4 @ 5 mils (60 -130 Microns)	
Film roll diameter:.....	Max: 40" (1000 mm)	
Recipes filling line:.....	100 recipes free programmable	
Operating pressure:.....	85 – 100 PSI (6 – 7 bar)	
Electrical requirements:.....	480 volts 60 Hz	
Ambient temperature:.....	+40°F to +104°F (+5°C to +40°C)	



Key Benefits

- Built and supported in North America
- Smaller machine Height
- Smaller Footprint
- Easier and Safer Film Changeover (Ground Level)
- Simpler Design
- Lower price





W CARE

Client Services

SERVICE



Our courteous and dynamic team
always stay at it's best for you

92% of satisfaction rate
(industry average is 83%)
in the 2014 Customer
satisfaction survey



175
SERVICE TECHNICIANS WORLDWIDE





SPARE PARTS



- EXTENDED HOURS:
8:00 AM TO 8:00 PM (Eastern Time) on the phone
24 hours a day online

- SPARE PARTS DEPOTS:
 - ✓ RIVIERE-DU-LOUP (QC)
 - ✓ MONTGOMERY (AL)
 - ✓ SALT LAKE CITY (UT)
 - ✓ SÃO PAULO, BRAZIL

- DEDICATED MANUFACTURING LINE FOR PARTS

- WALK THE TALK & LEAD TIME KPI

Order parts online
Get 5% off







 **PREMIER TECH**

THANK YOU!